


**PLAN**

**NOTES:**

1. THE USE OF AUGERS OR TREE SPADES FOR EXCAVATING TREE PITS IS NOT PERMITTED.
2. TOP OF ROOT BALL TO BE ELEVATED 100 MM ABOVE GRADE.
3. ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.

MULCH AS PER SPECIFICATION

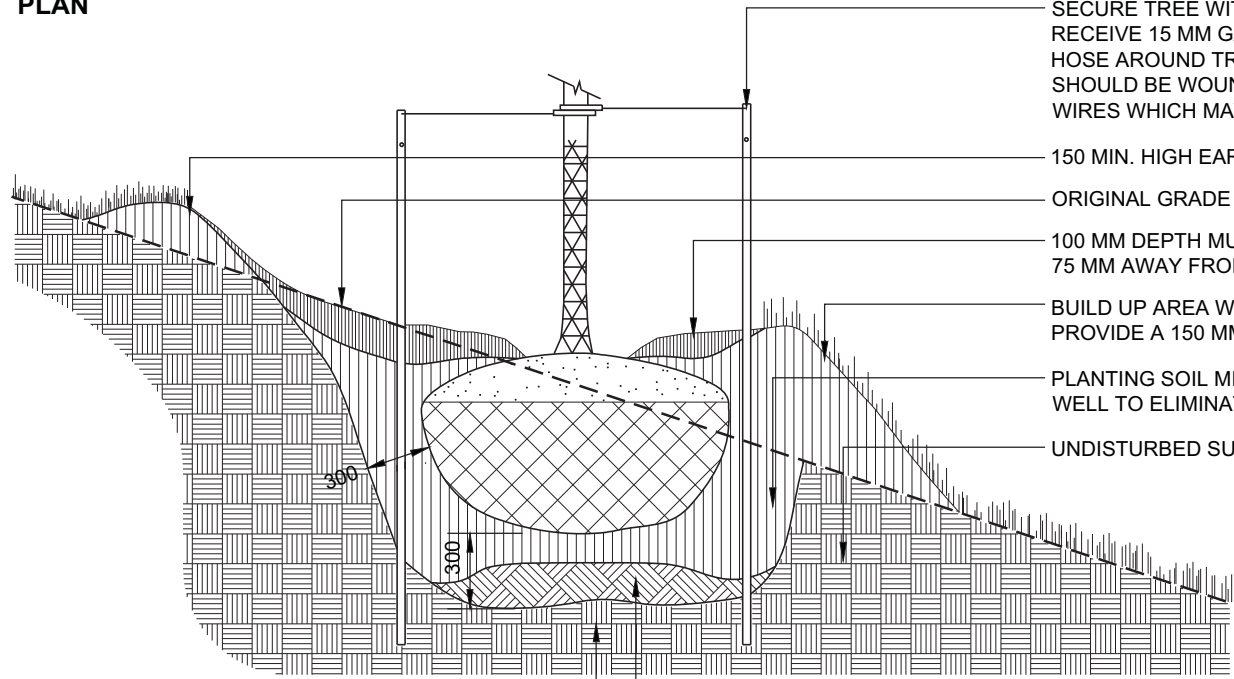

**SECTION**

SECURE TREE WITH 2 T-BARS, 38 x 38 x 2240 LONG DRILLED TO RECEIVE 15 MM GALVANIZED WIRE THROUGH A 12.7 MM DIA. HOSE AROUND TRUNK AND/OR MAJOR BRANCH. GUIDE WIRES SHOULD BE WOUND TIGHTLY THERE MUST BE NO PROTRUDING WIRES WHICH MAY CAUSE A HAZARD.

150 MIN. HIGH EARTH BERM

ORIGINAL GRADE OF SLOPE

100 MM DEPTH MULCH AS PER SPECIFICATION, 75 MM AWAY FROM AROUND PLANT TRUNK

BUILD UP AREA WITH PLANTING SOIL TO PROVIDE A 150 MM MIN. HIGH SAUCER

PLANTING SOIL MIXTURE. LIGHTLY COMPACTED AND WATER WELL TO ELIMINATE AIR POCKETS AND PREVENT SETTLEMENT.

UNDISTURBED SUBGRADE

150 MM SCARIFY SUBGRADE, MIX WITH 50% PLANTING SOIL

WELL COMPACTED PLANTING SOIL UNDER ROOT BALL