

THE CORPORATION OF THE CITY OF BRAMPTON

BY-LAW

Number	249-	2013	

To amend By-law 270-2004, as amended

The Council of the Corporation of the City of Brampton ENACTS as follows:

- 1. By-law 270-2004, as amended, is hereby further amended:
 - (1) by changing Schedule A thereto, the zoning designation of the lands as shown outlined on Schedule A to this by-law:

From:	То:
AGRICULTURAL (A), RESIDENTIAL SINGLE DETACHED F-12.5 – SECTION 2199 (R1F-9.0-SECTION 2119), RESIDENTIAL SINGLE DETACHED F-12.5 – SECTION 2200 (R1F-9.0-SECTION 2200), RESIDENTIAL SINGLE DETACHED F-9.0 – SECTION 2201 (R1F-9.0-SECTION 2201), RESIDENTIAL SINGLE DETACHED F-9.0 – SECTION 2202 (R1F-9.0-SECTION 2202), RESIDENTIAL TOWNHOUSE R3E-5.5 – SECTION 2204 (R3E-5.5-SECTION-2204), RESIDENTIAL TOWNHOUSE R3E-5.5 – SECTION 2205 (R3E-5.5-SECTION-2205); and OPEN SPACE (OS)	RESIDENTIAL SINGLE DETACHED F-9.0 – SECTION 2448 (R1F-9.0-SECTION 2448), RESIDENTIAL SINGLE DETACHED F-9.0 – SECTION 2449 (R1F-9.0-SECTION 2449), RESIDENTIAL TOWNHOUSE E-5.5 – SECTION 2450 (R3E-5.5-SECTION-2450); and, OPEN SPACE (OS)

- (2) by adding thereto the following sections:
 - "2448 The lands designated R1F-9.0 Section 2448 on Schedule A to this by-law;
 - 2448.1 Shall only be used for the purposes permitted in a R1F-9.0 zone;
 - 2448.2 Shall be subject to the following requirements and restrictions:

- (1) Minimum Lot Area: Interior Lot –225.0 square metres; Corner Lot – 255.0 square metres;
- (2) Minimum Lot Width: Interior Lot – 9.0 metres; Corner Lot – 10.8 metres;
- (3) Minimum Lot Depth: 25.0 metres;
- (4) Minimum Front Yard Depth:
 - a) 3.0 metres;
 - b) 5.5 metres to a garage door facing the front lot line;
 - c) 4.5 metres to the front of a garage from a daylight rounding/triangle;
 - d) the main wall of a dwelling may encroach into the front yard to within 1.0 metres of a daylight rounding/triangle;
 - e) a porch and/or balcony with or without foundation or cold cellar may encroach 2.0 metres into the minimum front vard;
 - f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle;
 - g) a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum front yard;
 - h) a bay window, bow window or box window with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle; and
 - i) 5.5 metres to one garage and 1.0 metres to the second garage for a staggered two car garage on lots 11.0m and greater;
- (5) Minimum Exterior Side Yard:
 - a) 3.0 metres
 - b) 1.2 metres where the exterior side yard abuts a public or private lane;
 - c) 5.5 metres to a garage door facing the exterior side yard for corner lots 11.0 metres or greater;
 - d) the main wall of a dwelling may encroach into the exterior side yard to within 1.0 metres of a daylight rounding/triangle;
 - e) a porch and/or balcony with or without foundation or cold cellar and chimney may encroach 2.0 metres into the minimum exterior side yard;
 - f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into the exterior side yard to within 0.0 metres of a daylight rounding triangle;
 - g) a bay window, bow window or box window with or without foundation and a porch or cold cellar including eaves and cornices may encroach into the exterior side yard to within 0.0 metres of a daylight rounding/triangle;
 - a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum exterior side yard; and

 for corner lots with a 1.2 metres exterior side yard adjacent to a lane, the maximum encroachment of any type into an exterior side yard shall be 0.5 metres;

(6) Minimum Rear Yard Setback:

- a) 6.0 metres for an interior lot;
- b) 3.0 metres for a corner lot provided that not less than 50% of the unit width is setback 6.0 metres from the rear lot line;
- c) 3.5 metres to a walkout balcony or uncovered terrace on the second storey, or wood deck off the main floor;
- d) 0.6 metres to an accessory building and/or to the side wall of a garage, where access to the garage is from the exterior side yard for lots greater than 11.0 metres;
- e) 4.5 metres for open roofed porches and or uncovered terraces not exceeding one storey; and
- f) a bay window, bow window or box window with or without foundation and a porch or cold cellar may encroach 1.0 metres into the minimum rear yard;

(7) Minimum Interior Side Yard:

- a) 1.2 metres on one side and 0.6 metres on the other side provided that the combined total for interior each lot is 1.8 metres;
- b) Interior side yards between two lots can be paired at 0.6 metres per paired lots, and or 1.2 metres and 0.6 metres per paired lots and or at 1.2 metres and 1.2 metres per paired lots;
- c) 1.2 metres where the side yard abuts a public walkway or a non-residential zone;
- d) 0.6 metres for a corner lot abutting another interior lot with a side yard of 0.6 metres, for a total of 1.2 metres between buildings;
- e) 0.3 metres to a porch and or balcony with or without foundation or cold cellar;
- f) 0.6 metres to an accessory building; and
- g) 0.7 metres to a bay, bow, or box window with or without foundation or cold cellar;
- (8) Maximum Building Height 11.0 metres
- (9) Minimum Landscaped Open Space:
 - a) those portions of all yards not occupied by permitted structures, accessory structures, permitted encroachments and permitted driveway shall consist of landscaped Open Space;
- (10) No garage may project more than 1.5 metres beyond the porch or front wall of a dwelling;
- (11) The following provisions apply to garages:
 - a) the maximum cumulative garage door width for lots, with a lot width less than 10.4 metres shall be 3.7 metres;
 - b) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 10.4 metres but less than 11.0 metres shall be 4.6 metres;

- c) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 11.0 metres but less than 12.5 metres shall be 5.0 metres;
- d) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 12.5 metres but less than 14.0 metres shall be 5.5 metres;
- e) for lots greater than 14.0 metres wide the maximum cumulative interior garage width shall be 6.4 metres or 50% of the dwelling unit width whichever is greater;
- f) a two bay garage shall be permitted on a corner lot when accessed from the front yard for lots 11.0 metres or greater;
- g) a three bay garage shall be permitted on a corner lot when accessed from the exterior side yard for corner lots greater than 11.0 metres;
- h) the garage door width may be widened by an extra 0.6 metres if the front of the garage projects 2.5 metres or less beyond the ground floor main entrance of the dwelling unit;
- the garage door width restriction does not apply to a garage door facing the exterior lot line; and
- j) the interior garage width, as calculated 3.0 metres from the garage opening shall be a maximum 0.9 metres greater than the maximum cumulative garage door width permitted on the lot, except for a staggered two car garage, the maximum interior garage width shall be 6.2 metres;
- (12) Notwithstanding Section 13.5.2.j.2 a garage may face the flankage lot line;
- (13) The following shall apply to a bay, bow or box window:
 - a) Notwithstanding Section 6.13 Table 6.13.A the maximum width of a bay, bow or box window with or without foundation shall be 4.5 metres;
 - Notwithstanding Section 6.13 Table 6.13.A the maximum depth of a bay, bow or box window with or without foundation shall be 1.0 metres;
 - c) A bay, bow or box window with a maximum depth of 0.6 metres does not need to contain side windows; and
 - d) A bay, bow or box window with a depth greater than 0.6 metres up to a maximum depth of 1.0 metres does need to contain side windows;
- (14) Notwithstanding Section 6.13 Table 6.13.A a porch, balcony and deck is permitted in the interior side yard;
- (15) Notwithstanding Section 10.9.1B.1 the following shall apply:
 - a) the minimum driveway width shall be 2.75 metres;
- (16) The driveway width shall not exceed the exterior width of the garage;
- (17) Notwithstanding Section 10.12 the following shall apply:
 - a) The minimum distance measured along a lot line between a driveway and the actual or projected point of intersection of two streets shall be 3.5 metres:

- 2448.3 Shall also be subject to the requirements and restrictions relating to the R1F-9.0 zone and all the general provisions of this by-law, which are not in conflict with those set out in Section 2448.2.
- 2449 The lands designated R1F-9.0 Section 2449 on Schedule A to this by-law;
- 2449.1 Shall only be used for the purposes permitted in a R1F-9.0 zone;
- 2449.2 Shall be subject to the following requirements and restrictions:
 - (1) Minimum Lot Area: Interior Lot –225.0 square metres; Corner Lot – 255.0 square metres;
 - (2) Minimum Lot Width:Interior Lot 9.0 metres;Corner Lot 10.8 metres;
 - (3) Minimum Lot Depth: No minimum required;
 - (4) Minimum Front Yard Depth:
 - a) 3.0 metres;
 - b) 5.5 metres to a garage door facing the front lot line;
 - c) 4.5 metres to the front of a garage from a daylight rounding/triangle;
 - d) the main wall of a dwelling may encroach into the front yard to within 1.0 metre of a daylight rounding/triangle;
 - e) a porch and/or balcony with or without foundation or cold cellar may encroach 2.0 metres into the minimum front yard;
 - f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle;
 - g) a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum front yard;
 - h) a bay window, bow window or box window with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle; and
 - i) 5.5 metres to one garage and 1.0 metres to the second garage for a staggered two car garage on lots 11.0m and greater;
 - (5) Minimum Exterior Side Yard:
 - a) 3.0 metres
 - b) 1.2 metres where the exterior side yard abuts a public or private lane;
 - c) 5.5 metres to a garage door facing the exterior side yard for corner lots 11.0 metres or greater;
 - d) the main wall of a dwelling may encroach into the exterior side yard to within 1.0 metres of a daylight rounding/triangle;
 - e) a porch and/or balcony with or without foundation or cold cellar and chimney may encroach 2.0 metres into the minimum exterior side yard;
 - f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into

- the exterior side yard to within 0.0 metres of a daylight rounding triangle;
- g) a bay window, bow window or box window with or without foundation and a porch or cold cellar including eaves and cornices may encroach into the exterior side yard to within 0.0 metres of a daylight rounding/triangle;
- h) a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum exterior side yard; and
- i) for corner lots with a 1.2 metres exterior side yard adjacent to a lane, the maximum encroachment of any type into an exterior side yard shall be 0.5 metres;

(6) Minimum Rear Yard Setback:

- a) 3.0 metres for an interior lot;
- b) 3.0 metres for a corner lot
- c) 1.5 metres to a rear yard for a walkout balcony or uncovered terrace on the second storey, or wood deck off the main floor, or an open roofed porch and or uncovered terrace not exceeding one storey;
- d) 0.6 metres to an accessory building and/or to the side wall of a garage, where access to the garage is from the exterior side yard for lots greater than 11.0 metres; and
- e) a bay window, bow window or box window with or without foundation and a porch or cold cellar may encroach 1.0 metre into the minimum rear yard;

(7) Minimum Interior Side Yard:

- a) 1.2 metres on one side and 0.6 metres on the other side provided that the combined total for each interior lot is 1.8 metres;
- b) Interior side yards between two lots can be paired at 0.6 metres per paired lots, and or 1.2 metres and 0.6 metres per paired lots and or at 1.2 metre and 1.2 metres per paired lots;
- c) 1.2 metres where the side yard abuts a public walkway or a non-residential zone;
- d) 0.6 metres for a corner lot abutting another interior lot with a side yard of 0.6 metres, for a total of 1.2 metres between buildings;
- e) 0.3 metres to a porch and or balcony with or without foundation or cold cellar;
- f) 0.6 metres to an accessory building; and
- g) 0.7 metres to a bay, bow, or box window with or without foundation or cold cellar;
- (8) Maximum Building Height 11.0 metres
- (9) Minimum Landscaped Open Space:
 - a) those portions of all yards not occupied by permitted structures, accessory structures, permitted encroachments and permitted driveway shall consist of landscaped Open Space;
- (10) No garage may project more than 1.5 metres beyond the porch or front wall of a dwelling;

- (11) The following provisions apply to garages:
 - a) the maximum cumulative garage door width for lots, with a lot width less than 10.4 metres shall be 3.7 metres;
 - b) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 10.4 metres but less than 11.0 metres shall be 4.6 metres;
 - c) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 11.0 metres but less than 12.5 metres shall be 5.0 metres;
 - d) the maximum cumulative garage door width for lots, with a lot width equal to or greater than 12.5 metres but less than 14.0 metres shall be 5.5 metres;
 - e) for lots greater than 14.0 metres wide the maximum cumulative interior garage width shall be 6.4 metres or 50% of the dwelling unit width whichever is greater;
 - f) a two bay garage shall be permitted on a corner lot when accessed from the front yard for lots 11.0 metres or greater;
 - g) a three bay garage shall be permitted on a corner lot when accessed from the exterior side yard for corner lots greater than 11.0 metres;
 - the garage door width may be widened by an extra 0.6 metres if the front of the garage projects 2.5 metres or less beyond the ground floor main entrance of the dwelling unit;
 - i) the garage door width restriction does not apply to a garage door facing the exterior lot line; and
 - the interior garage width, as calculated 3.0 metres from the garage opening shall be a maximum 0.9 metres greater than the maximum cumulative garage door width permitted on the lot, except for a staggered two car garage, the maximum interior garage width shall be 6.2 metres;
- (12) Notwithstanding Section 13.5.2.j.2 a garage may face the flankage lot line;
- (13) The following shall apply to a bay, bow or box window:
 - a) Notwithstanding Section 6.13 Table 6.13.A the maximum width of a bay, bow or box window with or without foundation shall be 4.5 metres;
 - b) Notwithstanding Section 6.13 Table 6.13.A the maximum depth of a bay, bow or box window with or without foundation shall be 1.0 metres;
 - c) A bay, bow or box window with a maximum depth of 0.6 metres does not need to contain side windows; and
 - d) A bay, bow or box window with a depth greater than 0.6 metres up to a maximum depth of 1.0 metres does need to contain side windows;
- (14) Notwithstanding Section 6.13 Table 6.13.A a porch, balcony and deck is permitted in the interior side yard;
- (15) Notwithstanding Section 10.9.1B.1 the following shall apply:
 - a) The minimum driveway width shall be 2.75 metres;

- (16) The driveway width shall not exceed the exterior width of the garage;
- (17) 60 square metres of at grade outdoor amenity space must be provided within the rear yard, and/or interior side yard and/or exterior side yard:
- (18) Notwithstanding Section 10.12 the following shall apply:
 - a) the minimum distance measured along a lot line between a driveway and the actual or projected point of intersection of two streets shall be 3.5 metres.
- 2449.3 Shall also be subject to the requirements and restrictions relating to the R1F-9.0 zone and all the general provisions of this by-law, which are not in conflict with those set out in Section 2449.2.
- The lands designated R3E-5.5 Section 2450 on Schedule A to this by-law;
- 2450.1. Shall only be used for the purposes permitted in a R3E-5.5 zone;
- 2450.2 Shall be subject to the following requirements and restrictions:
 - (1) Minimum Lot Area: Interior Lot –129.0 square metres; Corner Lot – 185.0 square metres; End Lot - 155.0 square metres;
 - (2) Minimum Lot Width: Interior Lot – 5.5 metres; Corner Lot – 8.5 metres; End Lot - 6.7 metres;
 - (3) Minimum Lot Depth: 23.5 metres;
 - (4) Minimum Front Yard Depth:
 - a) 3.0 metres;
 - b) 5.5 metres to garage door facing the front lot line;
 - c) 4.5 metres to the front of the garage from a daylight rounding/triangle;
 - d) the main wall of a dwelling may encroach into the front yard to within 1.0 metres of a daylight rounding/triangle;
 - e) a porch and/or balcony with or without foundation or cold cellar may encroach 2.0 metres into the minimum front yard;
 - f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle;
 - g) a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum front yard; and
 - h) a bay window, bow window or box window with or without foundation or cold cellar including eaves and cornices may encroach into the front yard to within 0.0 metres of a daylight rounding/triangle;

(5) Minimum Exterior Side Yard:

a) 3.0 metres

- b) 1.2 metres where the exterior side yard abuts a public or private lane;
- c) 5.5 metres to a garage door facing the exterior side yard for corner lots 11.0 metres or greater;
- d) the main wall of a dwelling may encroach into the exterior side yard to within 1.0 metres of a daylight rounding/triangle;
- e) a porch and/or balcony with or without foundation or cold cellar and chimney may encroach 2.0 metres into the minimum exterior side yard;
- f) a porch and/or balcony with or without foundation or cold cellar including eaves and cornices may encroach into the exterior side yard to within 0.0 metres of a daylight rounding/triangle;
- g) a bay window, bow window or box window with or without foundation and a porch or cold cellar including eaves and cornices may encroach into the exterior side yard to within 0.0 metres of a daylight rounding/triangle;
- h) a bay window, bow window or box window with or without foundation or cold cellar may encroach 1.0 metres into the minimum exterior side yard; and
- i) for corner lots with a 1.2 metres exterior side yard adjacent to a lane, the maximum encroachment of any type into an exterior side yard shall be 0.5 metres;

(6) Minimum Rear Yard:

- a) 5.0 metres for an interior lot;
- b) 3.0 metres for a corner lot provided that not less than 50% of the unit width is setback 5.0 metres from the rear lot line;
- c) 3.5 metres to a walkout balcony or uncovered terrace on the second storey, or wood deck off the main floor;
- d) 0.6 metres accessory building and/or to the side wall of a garage, where access to the garage is from the exterior side yard;
- e) a bay window, bow window or box window with or without foundation and a porch or cold cellar may encroach 1.0 metres into the rear yard; and
- f) Section 10.13.3 shall not apply;

(7) Minimum Interior Side Yard:

- a) 1.2 metres and 0.0 metres when abutting side lot line coincides with a common wall between two dwellings;
- b) 0.6 metres to an accessory building; and
- c) 0.7 metres to a bay, bow, or box window with or without foundation or cold cellar;
- (8) Maximum Building Height 14.0 metres;
- (9) Notwithstanding Section 16.10.2.d, no minimum dwelling unit width required;

(10) Minimum Landscaped Open Space:

a) those portions of all yards not occupied by permitted structures, accessory structures, permitted

encroachments and permitted driveway shall consist of landscaped Open Space;

- (11) No garage may project more than 1.5 metres beyond the porch or front wall of a dwelling;
- (12) The following provisions apply to garages:
 - a) the maximum cumulative garage door width for interior lots, with a lot width less than 6.0 metres shall be 3.7 metres;
 - b) the maximum cumulative garage door width for interior lots, with a lot width equal to 6.0 metres but less than 9.8 metres shall be 4.6 metres;
 - c) the maximum cumulative garage door width for interior lots, with a lot width equal to 9.8 metres but less than 10.7 metres shall be 5.0 metres;
 - d) the maximum cumulative garage door width for interior, lots equal to 10.7 metres but less than 12.2 metres shall be 5.5 metres;
 - e) the maximum cumulative garage door width for corner lot, with a lot width equal to or greater than 6.0 metres shall be 5.5 metres;
 - f) a two bay garage shall be permitted on a corner lot, and on an end townhouse unit flanking a buffer block, where the buffer block is located between the end unit and another road facing the side yard, the maximum interior garage width shall be 6.4 metres, with a maximum cumulative garage door width of 5.5 metres;
 - g) the garage door width may be widened by an extra 0.6 metres if the front of the garage projects 2.5 metres or less beyond the ground floor main entrance of the dwelling unit;
 - h) the garage door width restriction does not apply to a garage door facing the exterior lot line; and
 - i) the interior garage width, as calculated 3.0 metres from the garage opening shall be a maximum 0.9 metres greater than the maximum cumulative garage door width permitted on the lot, except for a two car garage on a corner lot or an end townhouse unit flanking a buffer block located between the end unit and another road, the maximum interior garage width shall be 6.4 metres;
- (13) Notwithstanding Section 16.10.2.k.2 a garage may face the flankage lot line;
- (14) The following shall apply to a bay, bow or box window:
 - a) Notwithstanding Section 6.13 Table 6.13.A the maximum width of a bay, bow or box window with or without foundation shall be 4.5 metres;
 - b) Notwithstanding Section 6.13 Table 6.13.A the maximum depth of a bay, bow or box window with or without foundation shall be 1.0 metres;
 - c) A bay, bow or box window with a maximum depth of 0.6 metres does not need to contain side windows; and
 - d) A bay, bow or box window with a depth greater than 0.6 metres up to a maximum depth of 1.0 metres does need to contain side windows;
- (15) Notwithstanding Section 6.13 Table 6.13.A a porch, balcony and deck is permitted in the interior side yard;

- (16) Notwithstanding Section 10.13.2 the following shall apply:
 - a) front to rear yard access shall be permitted via non habitable rooms and with more than a two step grade difference;
- (17) Notwithstanding Section 10.9.1B.1 the following shall apply:
 - a) the minimum driveway width shall be 2.75 metres;
- (18) The driveway width shall not exceed the exterior width of the garage;
- (19) Section 10.12 shall not apply;
- 2450.3 Shall also be subject to the requirements and restrictions relating to the R3E-5.5 zone and all the general provisions of this by-law, which are not in conflict with those set out in Section 2450.2."

READ a FIRST, SECOND and THIRD TIME, and PASSED in OPEN COUNCIL,

this 25th day of September

USAN FENNELL - MAYOR


PETER FAY - CITY CLERK COMME

Approved as to Content:

Dan Kraszewski, MCIP, RPP, Senior Executive Director,

Planning, Design and Development

APPROVED AS TO FORM LAW DEPT. BRAMPTON DATE 13 09 17

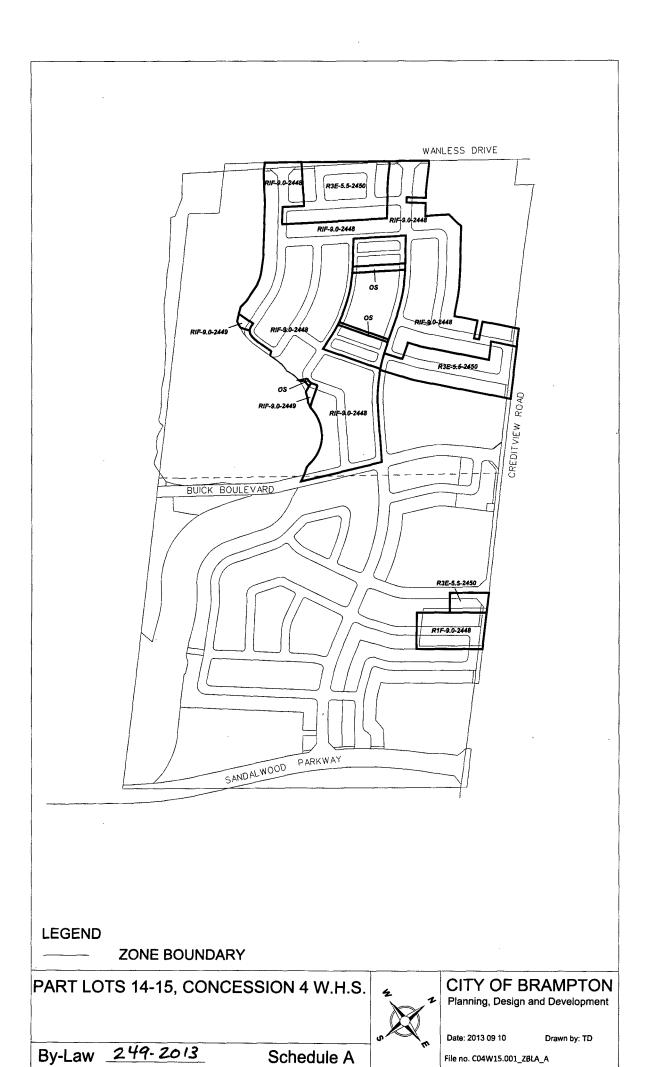

Schedule A

File no. C04W15.001_ZBLA_A

