


WING EXTENSION
BOTH SIDES


90 O.D. POSTS
AT CORNERS
TYPICAL

60 O.D.
INTERMEDIATE
POSTS, TYP.

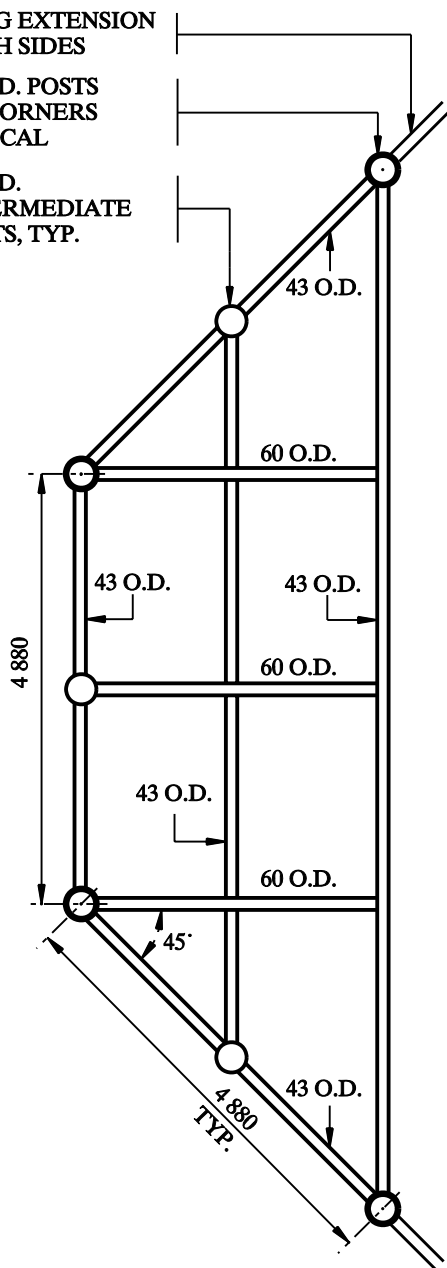

3 660 HIGH WING
EXTENSION BOTH
SIDES

43 O.D. VERTICAL
BAR GRILL ON TOP
OF BACKSTOP

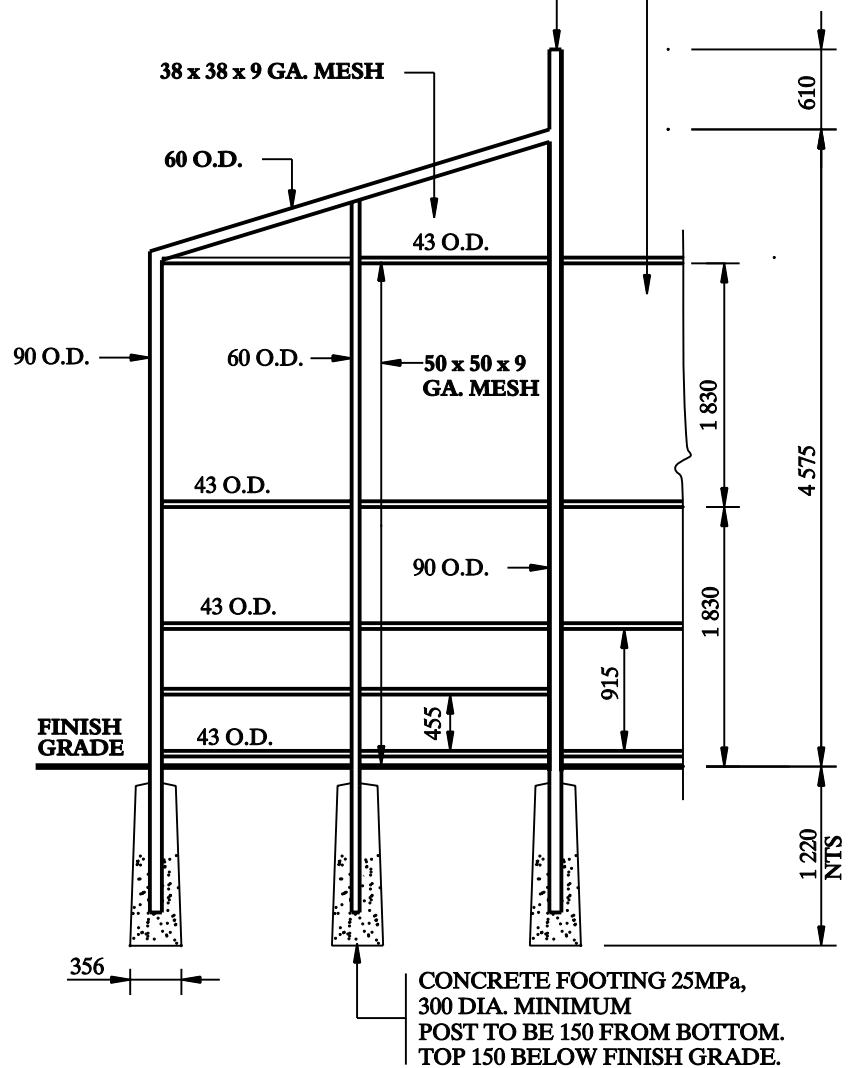

PLAN

SIDE ELEVATION

NOTES:

1. BACKSTOP AND FIRST WING EXTENSION TO BE OF ALL WELDED CONSTRUCTION
2. WING EXTENSION TO HAVE SAME POST AND RAIL CONSTRUCTION AS BACKSTOP. REFER TO SPEC.
3. CHAIN LINK FABRIC ON BACKSTOP ROOF AND VERTICAL SIDES TO BE ONE PIECE SECURED WITH STRETCHER BARS AND BAR BANDS @ 250 O.C.
4. SECURE CHAIN LINK FABRIC TO INTERMEDIATE POSTS AND ALL RAILS WITH 3.5mm GALVANIZED KNUCKLED TIES AT 250 O.C. SECURE CHAIN LINK FABRIC TO BACKSTOP AND WING EXTENSION TERMINAL POSTS USING STRETCHER BARS AND BAR BANDS @ 250 O.C.
5. INSTALL CHAIN LINK FABRIC ON (PLAY) INSIDE OF BACKSTOP AND ON TOP SIDE OF CANOPY
6. ALL DIMENSIONS IN MILLIMETRES, UNLESS STATED OTHERWISE.



**PLANNING,
DESIGN &
DEVELOPMENT
DEPARTMENT**

**TITLE: SENIOR SOFTBALL BACKSTOP
CAGE STYLE (PLAN & SIDE ELEV.)**

**DRAWING NO.
PDD 426**

REVIEWED BY: *SH*

SCALE: **N.T.S.**

APPROVED BY: *Steve Walsh*

DATE: **JANUARY 2007**