


30 MPa C.I.P. CONCRETE CURB  
WITH 2-15M BARS CONTINUOUS  
SAW CUT JOINTS AT 3650 O.C.

ADJACENT SURFACE TO BE  
FLUSH WITH TOP OF CURB

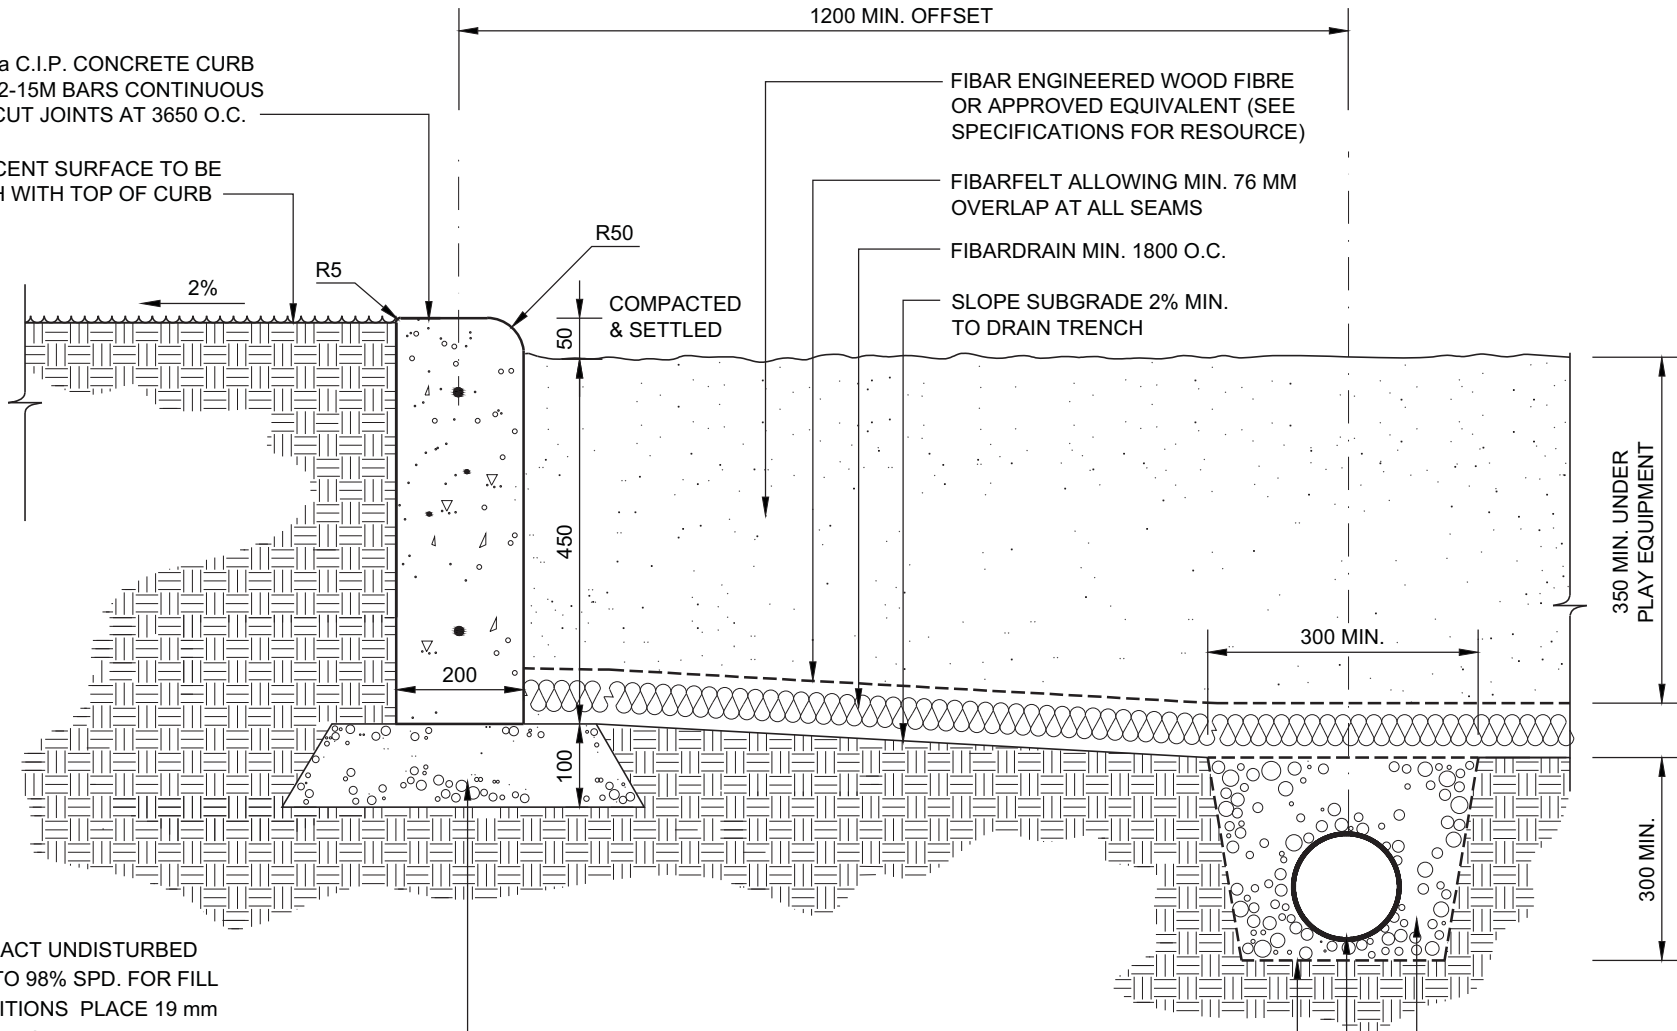

COMPACT UNDISTURBED  
SOIL TO 98% SPD. FOR FILL  
CONDITIONS PLACE 19 mm  
DIA. CRUSHER RUN  
LIMESTONE BASE AND  
COMPACT TO 98% SPD.

**NOTES:**

1. THE PLAY SURFACE AND DRAINAGE SYSTEM SHOULD BE FIBAR 300 SYSTEM OR APPROVED EQUIVALENT.
2. PLAY SURFACE MATERIAL SHALL BE INSTALLED AND COMPACTED IN TWO SEPARATE LAYERS OF EQUAL COMPACTED THICKNESS.
3. 100 DIA. RIGID PVC PIPE CONNECTION FROM PLAYGROUND CURB TO C.B.
4. CONTRACTOR TO MAINTAIN WOOD FIBRE LEVEL UNTIL FINAL ACCEPTANCE.
5. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.

FIBAR ENGINEERED WOOD FIBRE  
OR APPROVED EQUIVALENT (SEE  
SPECIFICATIONS FOR RESOURCE)

FIBARFELT ALLOWING MIN. 76 MM  
OVERLAP AT ALL SEAMS

FIBARDRAIN MIN. 1800 O.C.

SLOPE SUBGRADE 2% MIN.  
TO DRAIN TRENCH

100 DIA. PERFORATED PVC DRAIN  
PIPE WITH FILTER SOCK, 2% SLOPE  
TO RIGID PIPE CONNECTION

19 DIA. CLEAR CRUSHED  
LIMESTONE

350 MIN. UNDER  
PLAY EQUIPMENT

300 MIN.