


PLAN

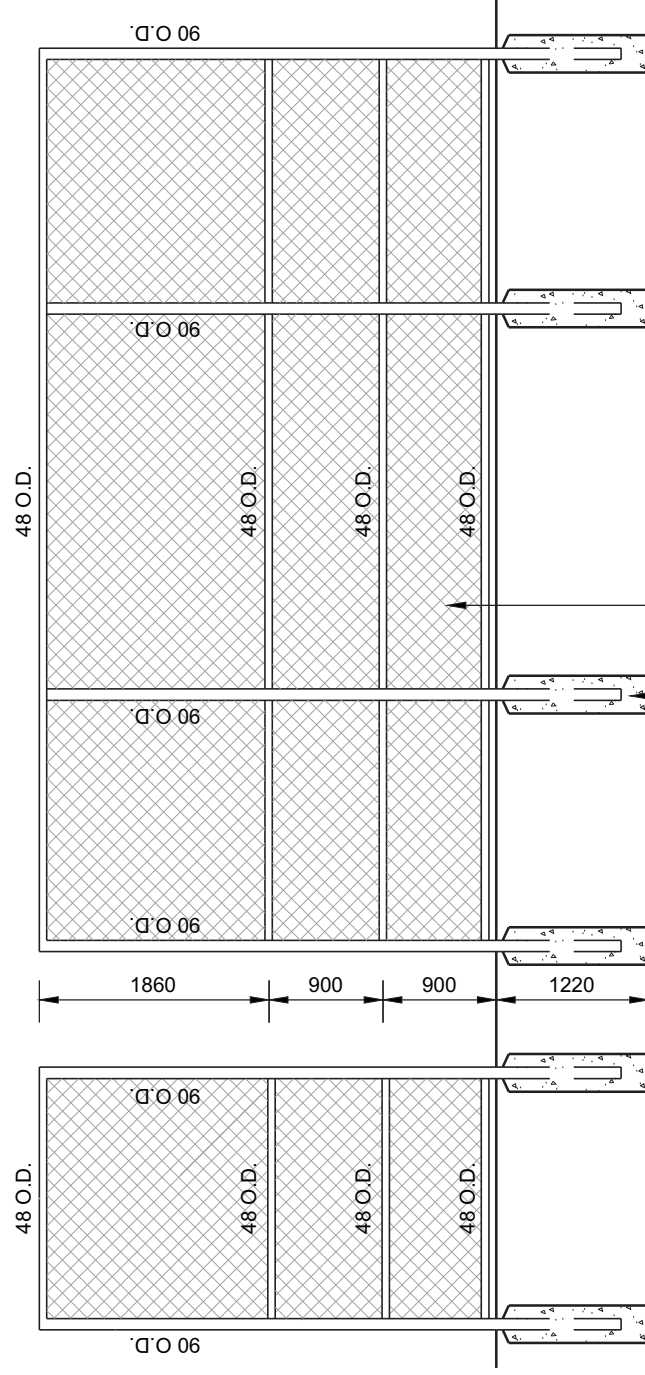

SIDE ELEVATION

REAR ELEVATION

NOTES:

1. ALL RAILS TO BE "FISH-MOUTH" CUT, CRIMPING WILL NOT BE ACCEPTED.
2. BACKSTOP JOINTS SHALL BE MITRED AND WELDED; WITH 38 x 38 mm, 9 GAUGE CHAIN LINK MESH.
3. ALL MESH TO BE FASTENED TO PLAYING SIDE OF BACKSTOP FRAME WITH STRETCHER BARS AND BAR BANDS @ 250 O.C. SECURE MESH TO RAILS WITH 3.5mm KNUCKLED TIES @ 250 O.C.
4. CHAIN LINK FABRIC TO BE GALVANIZED BEFORE WEAVING MESH (GBW).
5. REFER TO DETAIL L440 FOR T-BALL FIELD BACKSTOP LAYOUT.
6. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.



BRAMPTON
Flower City

T-BALL FIELD BACKSTOP

SPORTS FACILITIES - SERIES 400 SEPTEMBER 2014

L441

N.T.S