
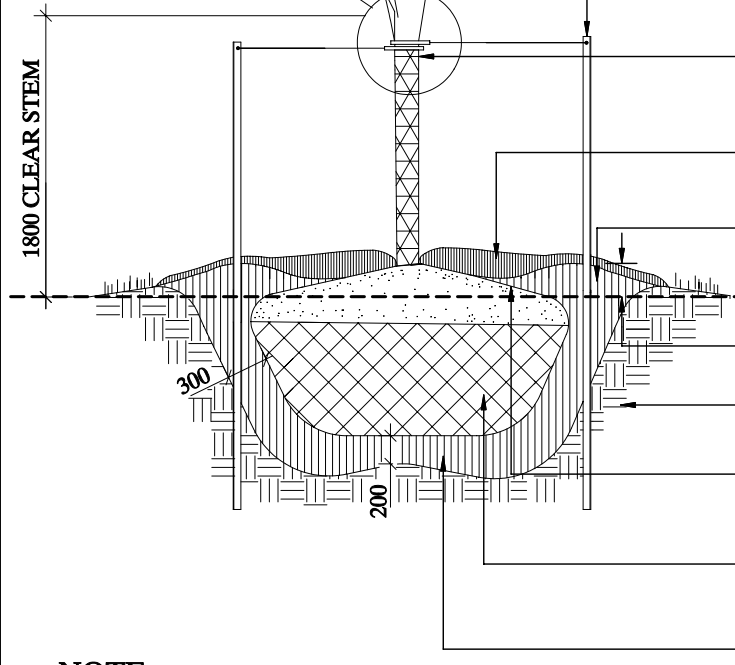


PRUNE ONLY DEAD OR DAMAGED BRANCHES IN ACCORDANCE WITH PROPER HORTICULTURAL PRACTICES. DO NOT PRUNE LEADER

TWO T-BARS, 38 x 38 x 2440 LONG, DRILL TO RECEIVE 1.5 DIA. GALVANIZED GUY WIRES, THREAD THROUGH 12.7 DIA. BLACK RUBBER HOSE, SECURE AROUND TRUNK AND/OR MAIN BRANCHES

GUIDE WIRES SHOULD BE WOUND TIGHTLY - THERE MUST BE NO PROTRUDING WIRES WHICH MAY CREATE A HAZARD

USE THREE T-BARS FOR 100 CALIPER TREES OR LARGER. LARGER TREES MAY BE GUYED RATHER THAN STAKED, AS DIRECTED BY THE LANDSCAPE ARCHITECT

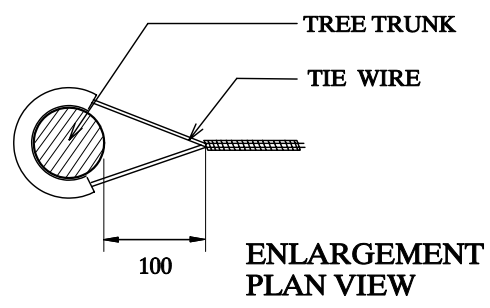

PROTECTIVE BURLAP TREE WRAP, REMOVE AFTER PLANTING

100 MM SHREDDED BARK MULCH, BY GRO-BARK OR ALL-TREAT FARMS, OR APPROVED ALTERNATE

PROVIDE 150 MM HIGH SAUCER RIM

**FINISH GRADE**

PLANT TREES 100 MM HIGHER THAN FINISH GRADE

SCARIFY SUBGRADE OF PLANTING PIT

REMOVE TOP RING OF WIRE BASKET AND TOP 1/3 OF BURLAP FROM ROOT BALL

PLANTING MIX, LIGHTLY COMPACT AND WATER VERY WELL TO ELLIMINATE AIR POCKETS

COMPACTED PLANTING SOIL UNDER ROOT BALL

**NOTE:**

1. STEEL T-BARS TO BE REMOVED AT END OF WARRANTY PERIOD, PRIOR TO FINAL INSPECTION.
2. SEE SPECIFICATIONS FOR PLANTING SOIL REQUIREMENTS.
3. REMOVE TREE WRAP PRIOR TO INSPECTION BY CITY OF BRAMPTON REPRESENTATIVE.
4. CALIPER TO BE MEASURED 305 ABOVE FINSH GRADE.
5. THE USE OF AUGERS OR TREESPADES FOR EXCAVATING TREE PITS IS NOT PERMITTED.
6. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.



**PLANNING,  
DESIGN &  
DEVELOPMENT  
DEPARTMENT**

<b>TITLE:</b> <b>DECIDUOUS TREE PLANTING</b>		<b>DRAWING NO.</b> <b>PDD 910</b>
<b>REVIEWED BY:</b> WK	<b>SCALE:</b> N.T.S.	
<b>APPROVED BY:</b>	<b>DATE:</b> MARCH 2004	