

STREETLIGHT OPEN TRENCH CONFIGURATION



DIRECTIONAL BORE (ROADWAY AND/OR BOULEVARD)

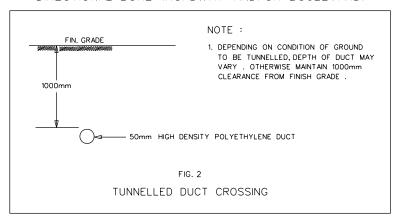

NOTES:

- 1. ALL DUCTS TO BE CSA APPROVED PVC TYPE II, TERMINATED WITH MANUFACTURED BELL ENDS. ALL SPARE DUCTS ARE TO BE CAPPED.
- 2. FISH STRING TO BE INSTALLED AND TIED OFF IN EACH DUCT INSTALLED



TRENCH DETAILS

APPROVED: **APRIL 2014**

REV. 0

549

JUNE 2006

ORIGINAL:

N.T.S