




PROVIDE
SHADE TREES
AT SEATING
TRASH
RECEPTACLE
BENCHES

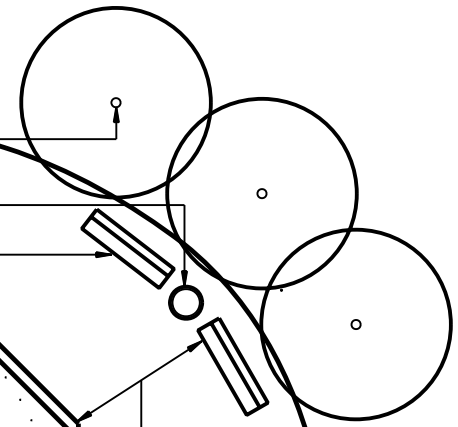

SETBACK TO PROPERTY LINES AND OTHER FACILITIES

TYPICAL PLAY STRUCTURE:
REFER TO SPECIFICATIONS;
ALL STEEL CONSTRUCTION,
COMPONENTS, INCLUDING
PLATFORMS, SLIDES, STEPS,
CLIMBING APPARATUS,
TO THE APPROVAL OF THE
PLANNING, DESIGN AND
DEVELOPMENT DEPARTMENT

EDGING - REFER TO
SPECIFICATIONS SHOWN
ON DETAIL 313

SLIDES TO FACE NORTH

2000 MIN. SAFETY ZONE
AROUND PLAY EQUIPMENT


20 000

PLAY AREA SURFACE
MATERIAL AND DEPTH
AS SPECIFIED

4 - SEAT SWING SET, 2 BABY
AND 2 ADULT SEATS TYP.
OR AS SPECIFIED

SUBSURFACE DRAINAGE
100 DIA. PERFORATED
DRAIN PIPE WITH FILTER
SOCK @ 2% SLOPE AROUND
PERIMETER, MIN. 1200
OFFSET FROM CURB
(SEE DETAIL PDD 311)

100 DIA. NON PERFORATED
RIGID PVC DRAIN PIPE
TO CATCHBASIN @ 2%

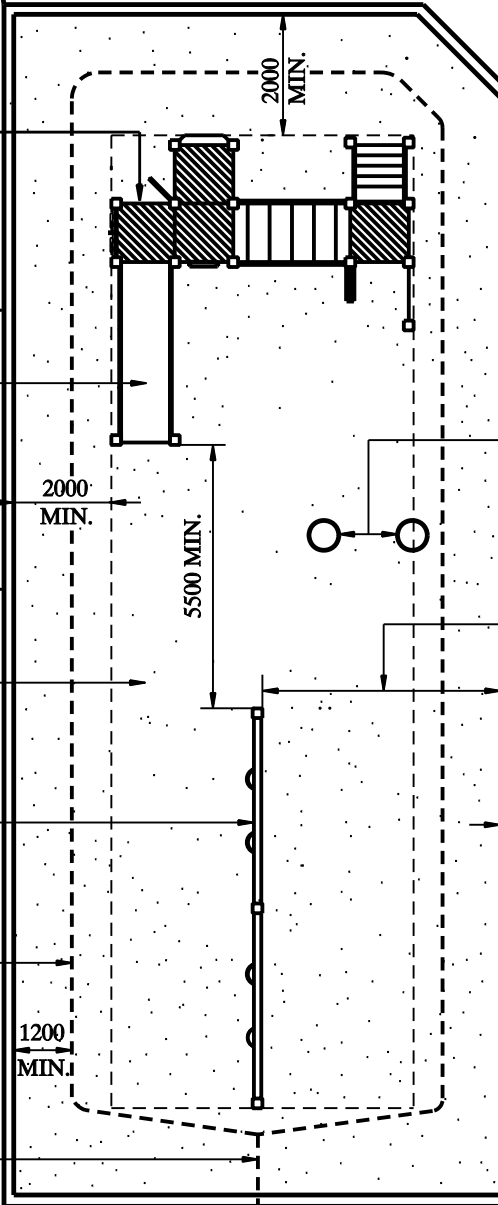

ASPHALT PATHWAY
MIN. 4000 WIDTH
AT BENCH LOCATIONS

2% SLOPE

POSSIBLE SPRING
TOY LOCATIONS

CURB

MIN. DIMENSION
VARIES WITH
SWING HEIGHT

3000 MIN.

1200
MIN.

NOTES:

1. PLAY AREA AND STRUCTURE SHOWN DO NOT REPRESENT A STANDARD. SCHEMATIC REPRESENTS ONLY TYPICAL MINIMUM SAFETY ZONES, DRAINAGE PATTERNS, AND MINIMUM SETBACKS.
2. PLAY STRUCTURE COMPONENTS, AND MINIMUM ZONES TO COMPLY WITH THE CURRENT CSA STANDARDS.
3. SUBGRADE TO BE AT 2% SLOPE.
4. EXISTING AND NEW TREES SHALL BE UTILIZED TO PROVIDE MAXIMUM SHADE TO SEATING AND PLAY AREA.
5. LAY OUT SHALL ALLOW FOR ALTERNATE CURB OR EDGE DESIGN (SEE DETAILS 311-313).
6. ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.



PLANNING,
DESIGN &
DEVELOPMENT
DEPARTMENT

TITLE: **PLAY AREAS (GENERIC)**
TYPICAL SETBACKS AND SAFETY ZONES

DRAWING NO.
PDD 310

REVIEWED BY: *SH Daudhary*

SCALE: **N.T.S.**

APPROVED BY: *Steve Walsh*

DATE: **JANUARY 2007**